



**Window Head**

Scale: 1:2.5



**Alternative Sill Flashing For Timber & Concrete**

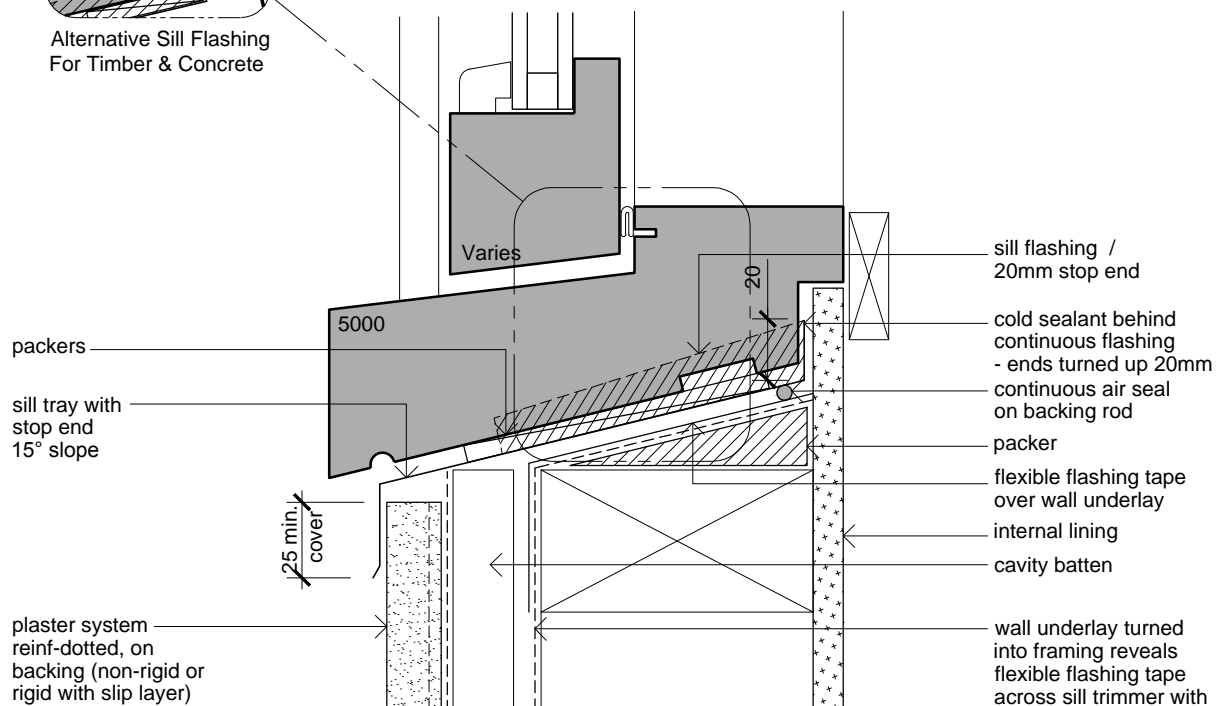

**Window Sill**

Scale: 1:2.5

Cladding Type:

**Plaster System on Cavity**

Window / Door Type:

**Awning / Casement**




NEW ZEALAND LIMITED  
JMF New Zealand Limited  
20 Cambridge Terrace  
Taradale, Napier 4112. NZ

**Installation Drawings**

Sheet: **1 of 2**

Issue: **F**

**A03-01**

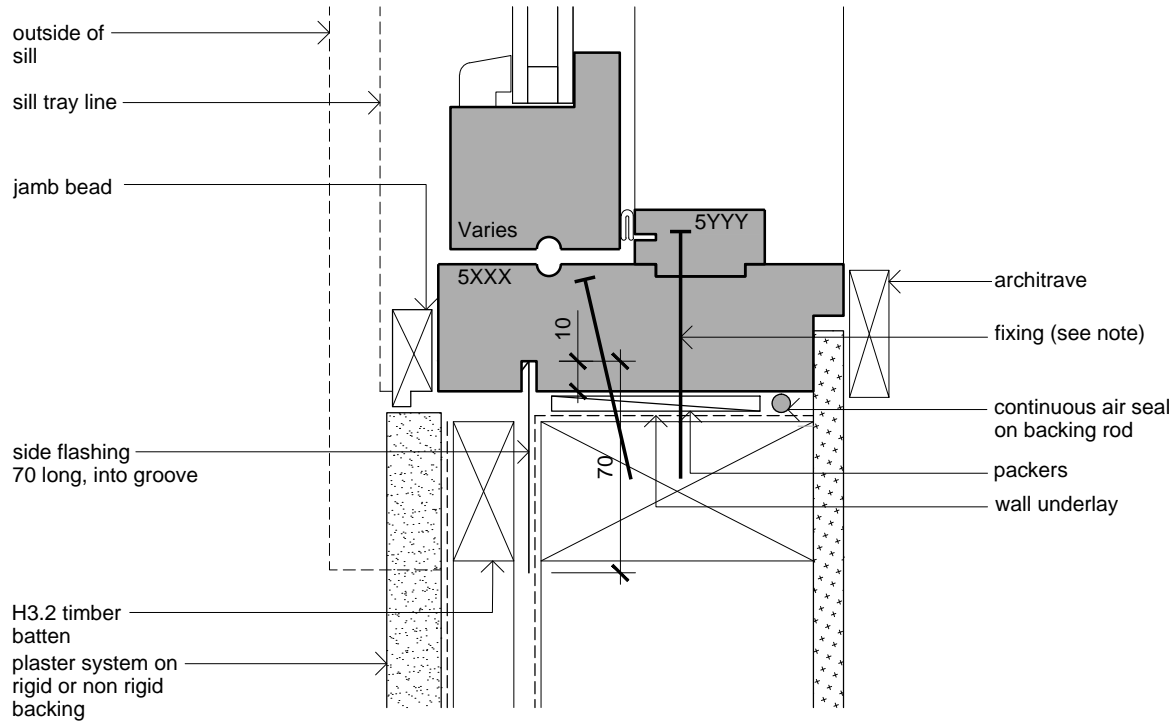

**Window Jamb**

Scale: 1:2.5

**NOTE:**

1. COLD SEALANT NEUTRAL CURE MODIFIED SILICONE.
2. SCREW OR NAIL FIXING JAMBS 200mm FROM HEAD AND SILL MAXIMUM 600 CENTRES.
3. SILL FLASHINGS TURNED UP 20mm AT EACH END OF FRAMES AND SEALED.
4. FIXING THROUGH SILL AS SHOWN ON DRAWINGS.
5. SITE FIXED FACINGS MUST HAVE COLD SEALANT BETWEEN FACING AND JAMB.

Cladding Type:

**Plaster System on Cavity**

Window / Door Type:

**Awning / Casement**



NEW ZEALAND LIMITED  
JMF New Zealand Limited  
20 Cambridge Terrace  
Taradale, Napier 4112. NZ

**Installation Drawings**

Sheet: **2 of 2**

Issue: **F**

**A03-01**