


Bi-Folding Windows

JMF New Zealand Limited 20 Cambridge Terrace Taradale, Napier 4112. NZ

A03-21

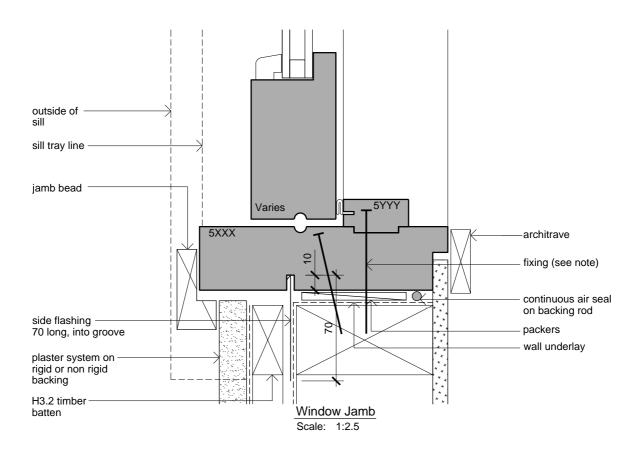

- NOTE: 1. COLD SEALANT NEUTRAL CURE MODIFIED SILICONE.
- 2. SCREW OR NAIL FIXING JAMBS 200mm FROM HEAD AND SILL MAXIMUM 600 CENTRES. 3.SILL FLASHINGS TURNED UP 20mm AT EACH END OF FRAMES AND SEALED.
- 4. FIXING THROUGH SILL AS SHOWN ON DRAWINGS.
- 5. SITE FIXED FACINGS MUST HAVE COLD SEALANT BETWEEN FACING AND JAMB.

Cladding Type:

Plaster on Cavity

Window / Door Type:

Bi-Folding Windows



Installation Drawings

Issue: D 2 of 2

A03-21