

Window / Door Type:


Bi-Folding Windows



Taradale, Napier 4112. NZ

1 of 2

A05-21

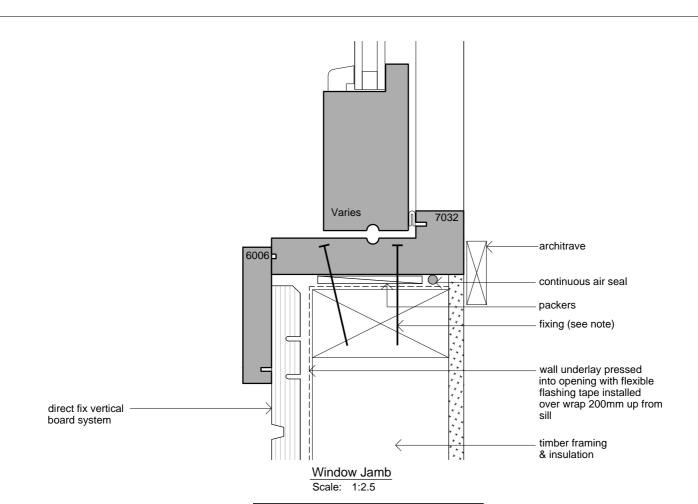

NOTE:

1. COLD SEALANT NEUTRAL CURE MODIFIED SILICONE.

2. SCREW OR NAIL FIXING JAMBS 200mm FROM HEAD AND SILL MAXIMUM 600 CENTRES. 3. SILL FLASHINGS TURNED UP 20mm AT EACH END OF FRAMES AND SEALED. 4. FIXING THROUGH SILL AS SHOWN ON

DRAWINGS.

5. SITE FIXED FACINGS MUST HAVE COLD SEALANT BETWEEN FACING AND JAMB.

Cladding Type:

Board & Batten

Window / Door Type:

Bi-Folding Windows



Installation Drawings

Sheet: 2 of 2 Issue: F

A05-21