



Window / Door Type:


Awning / Casement



Installation Drawings

Sheet: 1 of 2 Issue: G

A06-01

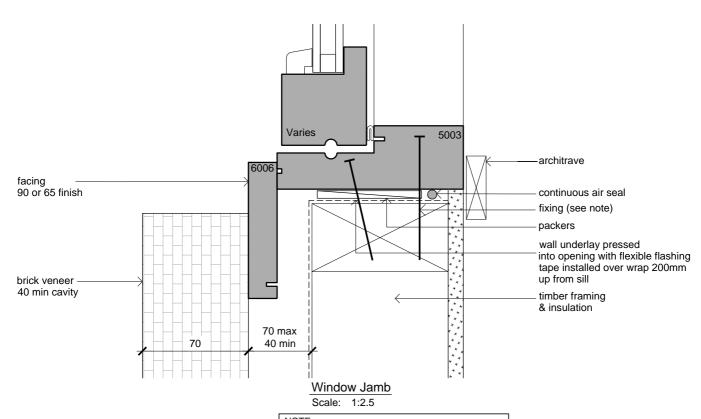

NOTE:

- 1. COLD SEALANT NEUTRAL CURE MODIFIED SILICONE.
- 2. SCREW OR NAIL FIXING JAMBS 200mm FROM HEAD AND SILL MAXIMUM 600 CENTRES.
 3.SILL FLASHINGS TURNED UP 20mm AT EACH END OF FRAMES AND SEALED.
- 4. FIXING THROUGH SILL AS SHOWN ON DRAWINGS
- 5. SITE FIXED FACINGS MUST HAVE COLD SEALANT BETWEEN FACING AND JAMB.

Cladding Type:

Brick Veneer

Window / Door Type:

Awning / Casement



Installation Drawings

eet: 2 of 2 Issue: G

A06-01