


Bi-Folding Doors



Taradale, Napier 4112. NZ

A06-22

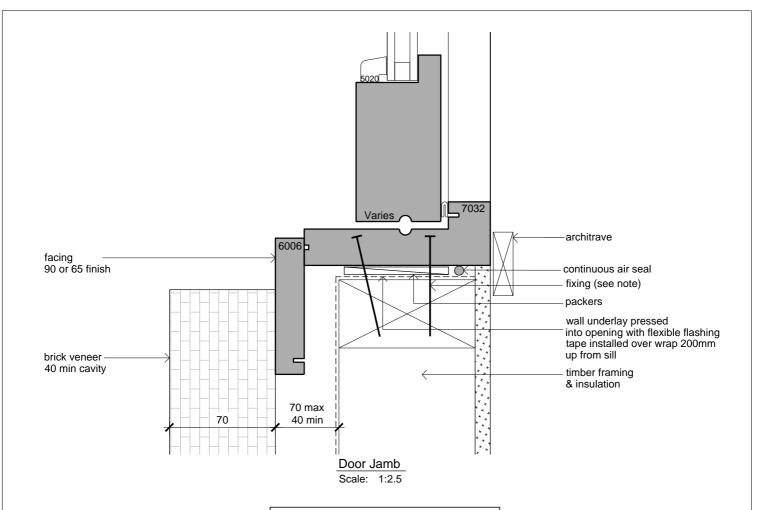

NOTE:

1. COLD SEALANT NEUTRAL CURE MODIFIED SILICONE.

2. SCREW OR NAIL FIXING JAMBS 200mm FROM HEAD AND SILL MAXIMUM 600 CENTRES. 3.SILL FLASHINGS TURNED UP 20mm AT EACH

END OF FRAMES AND SEALED. 4. FIXING THROUGH SILL AS SHOWN ON

DRAWINGS. 5. SITE FIXED FACINGS MUST HAVE COLD SEALANT BETWEEN FACING AND JAMB.

Cladding Type:

Brick Veneer

Window / Door Type:

Bi-Folding Doors



Installation Drawings

2 of 2 Issue: D

A06-22